



RELIABLE
STORAGE SYSTEMS

ELECTRIC DOUBLE DEEP REACH TRUCKS



**RNR/RNDR
030-045EC**





*One Stop Storage Solution
In Material Handling Equipments*




ELECTRIC DOUBLE DEEP REACH TRUCK

TRUCK DIMENSIONS - RNR035-045EC

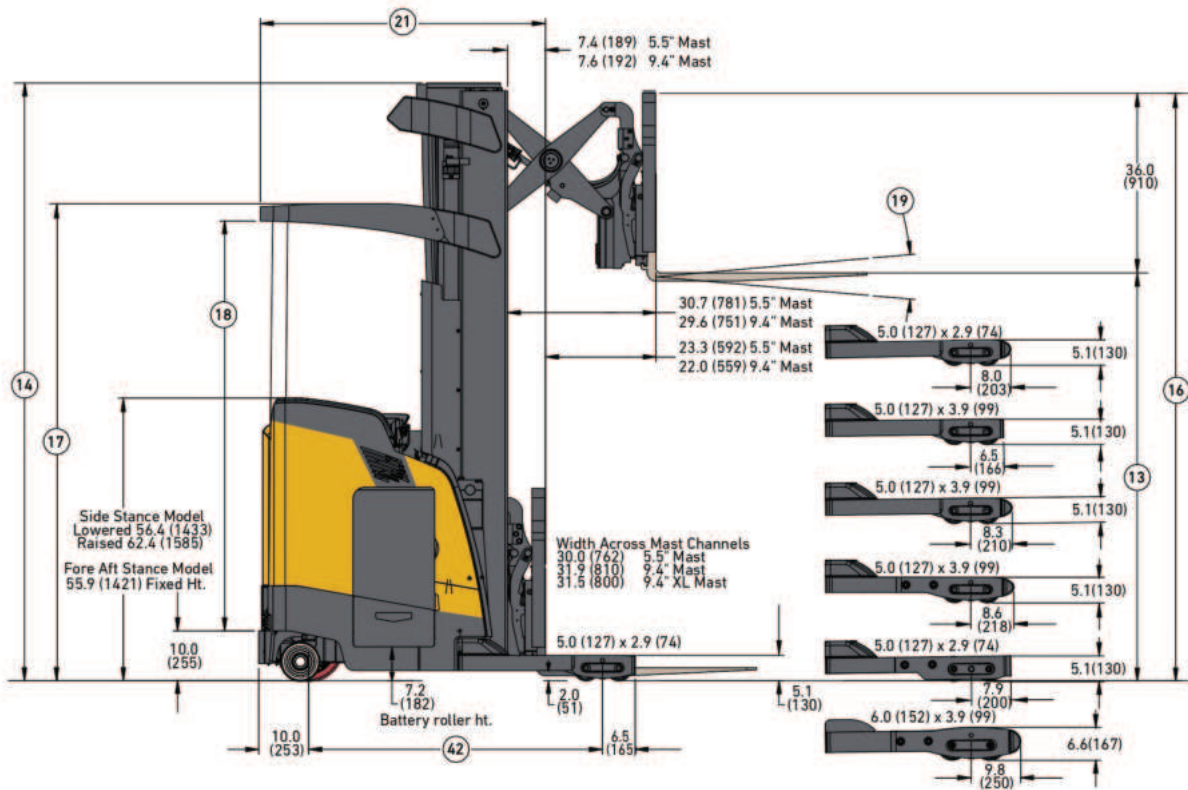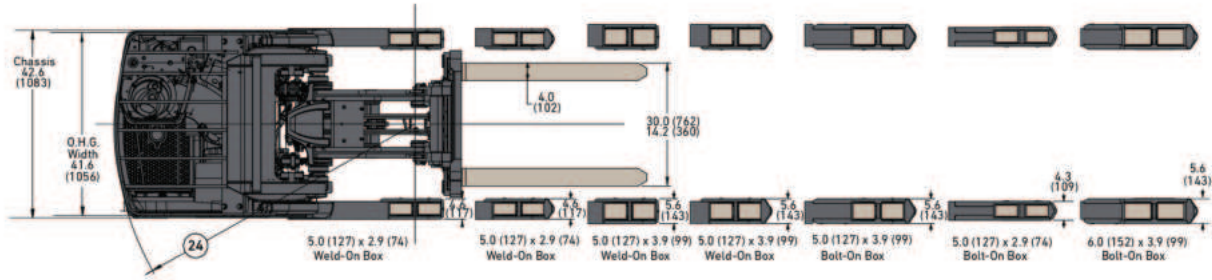

Circled truck dimensions correspond to the line numbers in the General Specifications chart. Dimensions are listed in inches (millimeters).

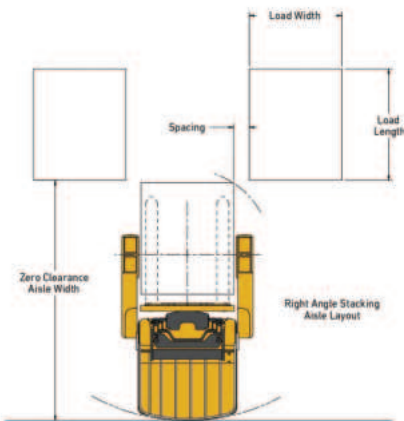

Right angle aisle stacking

RNR035-040EC - 5.5" MAST

14.25" Battery compartment and 42" ID
3 Stage - 4" between loads

Pallet length (inches)	Pallet width (inches)			
	36	40	44	48
36	85	85	85	85
40	87	87	86	86
44	92	91	91	90
48	96	96	95	95

Subtract 1" if without sideshift
Add 2" for 16.25" battery compartment

RNR40-045EC - 9.4" MAST

16.25" Battery compartment and 42" ID
3 Stage - 4" between loads

Pallet length (inches)	Pallet width (inches)			
	36	40	44	48
36	88	88	88	88
40	92	92	91	91
44	97	96	96	96
48	101	101	100	100

Subtract 1" for without sideshift
Add 2" for 18.25" battery compartment (NR045EC only)
Add 5" for 21.25" battery compartment (NR045EC only)

NOTE: These are "Zero Clearance" aisles and require an additional 6" to 12" to be added to provide for easier maneuvering.

☐ COMPLETE DESIGN ☐ LAYOUT ☐ CAD DRAWINGS ☐ INSTALLATION

For an additional update on us, please visit us at : www.reliablestorage.co.in



GENERAL SPECIFICATIONS -RNR035-045EC

		RNR035EC	RNR040EC	RNR045EC						
GENERAL	2	Model	RNR035EC	RNR040EC	RNR045EC					
	3	Wheel base designation *	SWB	SWB	SWB					
	4	Rated capacity	lb. (kg)	3500 (1588)	4000 (1814)	4500 (2041)				
	5	Load center	Distance	in. (mm)	24 (610)					
	6	Power type	Electric, diesel, LPG	Electric - 36V						
	7	Operator type	Stand							
	8	Tire type	Load/caster/drive	Poly/Poly/Poly						
	9	Wheels, number load/drive (x=driven)	4 / 2 (1x)							
	WT.	10	Truck weight, without battery (approximate)	lb.	5400	5400	5930			
12		Axle loading with assembly retracted (front/rear) **	lb.	6874/4375	7459/4290	8546/4228				
DIMENSIONS	13	Height	Standard lift (TOF)	in. (mm)	See mast table					
			Standard mast lowered (OALH)	in. (mm)						
			Freelift (TOF)	in. (mm)						
			Standard mast extended w/LBR	in. (mm)						
			Top of OHG	in. (mm)						
			Operator clearance	in. (mm)						
	19	Mast tilt angle	Forward/back	degrees	3 / 4					
	20	Forks, standard (length x width x thickness)	in.	1.60 x 3.9 x 42	1.80 x 3.9 x 42	1.80 x 3.9 x 42				
	21	Headlength to face of forks	All battery compartments ***	in. (mm)	See mast table					
	22	Outrigger ID	in.	34" - 49" (1" increments)						
	23	Battery compartment size	14.25" - (LxWxH)	in.	39.0 x 14.25 x 31.5	39.0 x 14.25 x 31.5	N/A			
			16.25" - (LxWxH)	in.	39.0 x 16.25 x 31.5	39.0 x 16.25 x 31.5	39.0 x 16.25 x 31.5			
			18.25" - (LxWxH)	in.	N/A	N/A	39.0 x 18.25 x 31.5			
21.25" - (LxWxH)			in.	N/A	N/A	39.0 x 21.25 x 31.5				
24	Turning radius - min. outside	14.25" battery compartment	in.	65.6	N/A	65.6	N/A	N/A		
		16.25" battery compartment	in.	67.6	N/A	67.6	68.5	68.5		
		18.25" battery compartment	in.	N/A	N/A	N/A	70.5	70.5		
		21.25" battery compartment	in.	N/A	N/A	N/A	73.5	73.5		
25	Aisle width - zero clearance	Right angle stack	See right angle stack table							
26	Stability	Comply with ANSI	YES							
PERFORMANCE	TRAVEL SPEED			STANDARD	OPTIONAL	STANDARD	OPTIONAL	STANDARD	OPTIONAL	
	28	Rearward (chassis first)	Empty/RL	mph	7.5/7.0	N/A	7.5/7.0 [†]	N/A	7.5/7.0 [†]	8.0/7.0 [†]
	29	Forward (forks first)	Empty/RL	mph	6.6/5.8	N/A	6.6/5.8 [†]	N/A	6.6/5.8 [†]	6.8/5.8 [†]
	LIFT SPEED ****			STANDARD	OPTIONAL	STANDARD	OPTIONAL	STANDARD	OPTIONAL	
	31	Empty	ft/min	130	N/A	130	150	150	175	
	31a	1,000 lb.	ft/min	110	N/A	110	133	133	150	
	32	2,000 lb.	ft/min	95	N/A	95	115	115	130	
	33	3,000 lb.	ft/min	78	N/A	78	100	100	115	
	34	3,500 lb.	ft/min	75	N/A	75	87	87	105	
	35	4,000 lb.	ft/min	N/A	N/A	70	83	83	100	
36	4,500 lb.	ft/min	N/A	N/A	N/A	N/A	80	95		
37	Lowering speeds	Empty ****	ft/min	110	N/A	110	140	140	160 ^{††}	
		RL****	ft/min	110	N/A	110	140	140	160 ^{††}	
39	Size - front load wheels, standard			5 x 3.9		5 x 3.9		5 x 3.9		
WHEELS & TIRES	41	Size, standard - drive tire/dual casters			13.5 x 5.5 / 7.9 x 2.2					
	42	Wheelbase	14.25" battery compartment	in.	55.6	N/A	55.6	N/A	N/A	
			16.25" battery compartment	in.	57.6	N/A	57.6	58.5	58.5	
			18.25" battery compartment	in.	N/A		N/A		60.5	
			21.25" battery compartment	in.	N/A		N/A		63.5	
	43	Brakes	Service/parking (method of control)	Foot / auto						
	Service/parking (method of operation)		Regen / spring apply (electric release)							
ELECTRIC	45	Battery type	Lead acid							
	46	Traction motor rating (60 minute rating)	hp (kw)	8.9 (6.6)						
	47	Hoist motor rating (5 minute rating)	hp (kw)	29.2 (21.8)						
	48	Traction motor control method	Transistor							
	49	Hoist motor control method	Transistor							
50	Number of speeds	Infinitely variable								


☐ COMPLETE DESIGN ☐ LAYOUT ☐ CAD DRAWINGS ☐ INSTALLATION

For an additional update on us, please visit us at : www.reliablestorage.co.in

TRUCK DIMENSIONS - RNR030-035EC

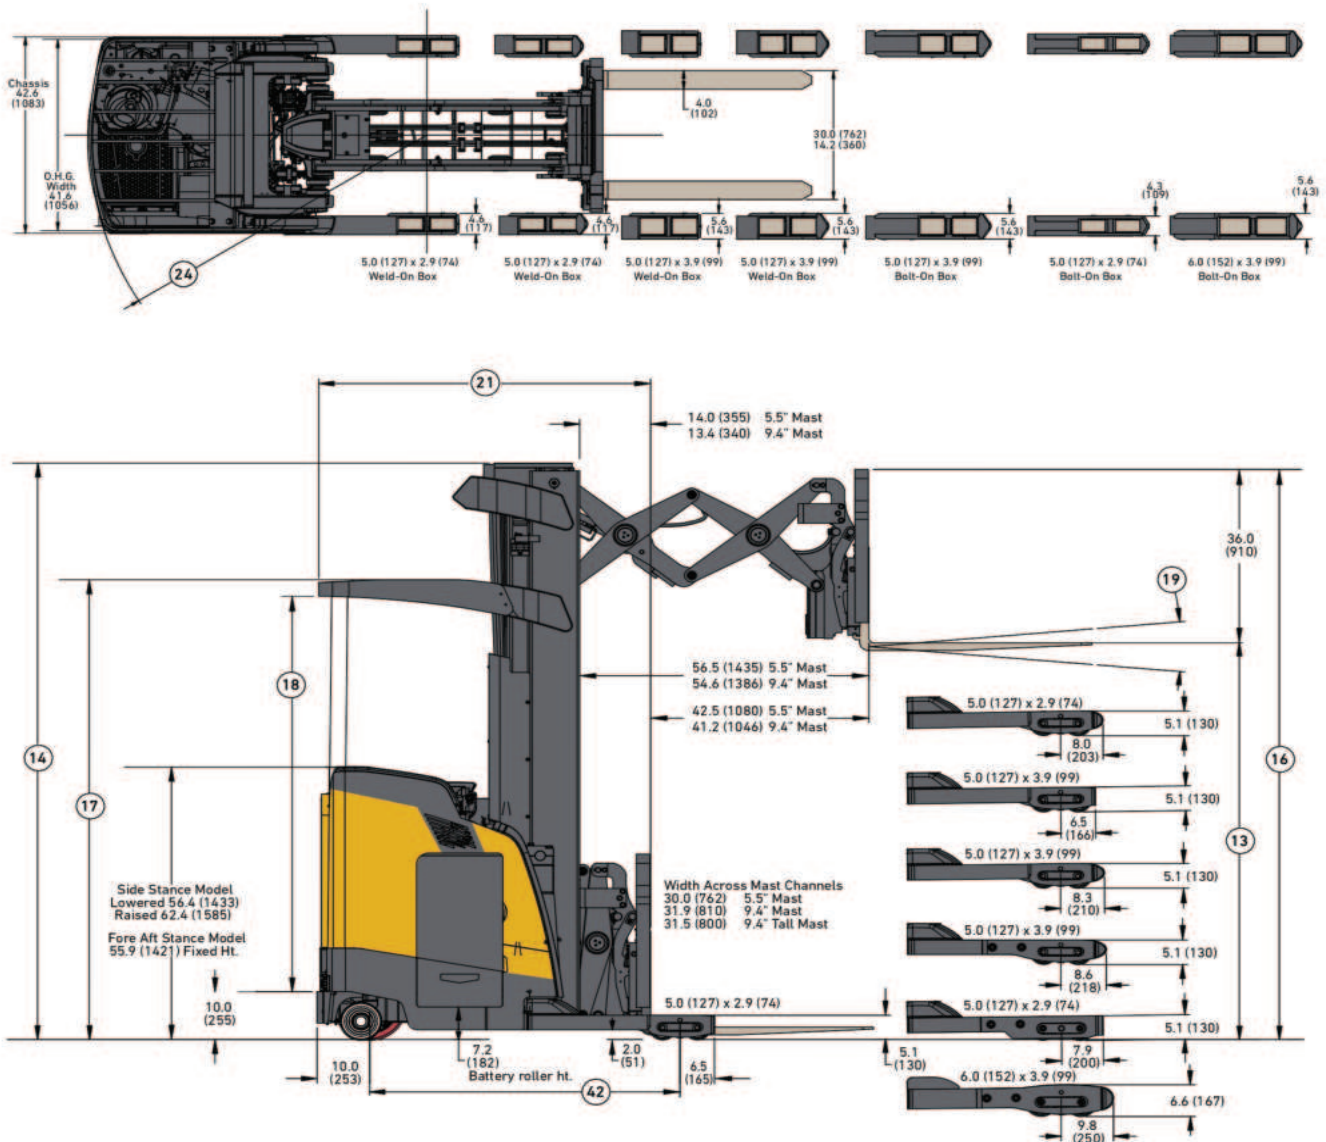

Circled truck dimensions correspond to the line numbers in the General Specifications chart. Dimensions are listed in inches (millimeters).

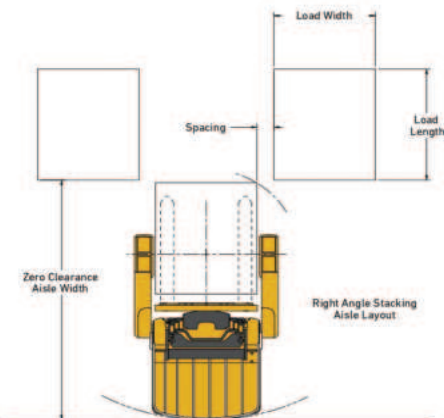

Right angle aisle stacking

RNR030-030EC - 5.5" MAST

14.25" Battery compartment and 42" ID
3 Stage - 6" between loads

Pallet length (inches)	Pallet width (inches)			
	36	40	44	48
36	87	86	86	86
40	91	90	90	89
44	96	95	95	94
48	100	100	99	99

Sideshift is standard on double reach
Add 2" for 16.25" battery compartment

RNR030-035EC - 9.4" MAST

16.25" Battery compartment and 42" ID
3 Stage - 6" between loads

Pallet length (inches)	Pallet width (inches)			
	36	40	44	48
36	92	91	91	90
40	96	96	95	95
44	101	100	100	99
48	105	105	104	104

Sideshift is standard on double reach
Add 2" for 18.25" battery compartment (INDR035EC only)
Add 5" for 21.25" battery compartment (INDR035EC only)

NOTE: These are "Zero Clearance" aisles and require an additional 6" to 12" to be added to provide for easier maneuvering.


GENERAL SPECIFICATIONS RNDR030-035EC

		RNDR030EC				RNDR035EC					
GENERAL	2	Model									
	3	Wheel base designation *	LWB	SWB	LWB	SWB	LWB	SWB	SWB		
	4	Rated capacity	3000 (1361)				3500 (1588)				
	5	Load center	Distance	24 (610)							
	6	Power type	Electric, diesel, LPG				Electric - 36V				
	7	Operator type					Stand				
	8	Tire type	Load/caster/drive	Poly/Poly/Poly							
	9	Wheels, number load/drive (x=driven)					4 / 2 (1x)				
	WT.	10	Truck weight, without battery (approximate)	5650				6190			
12		Axle loading with assembly retracted (front/rear) **	6409/4589				7578/4458				
DIMENSIONS	13	Height	Standard lift (TOF)	in. (mm)				See mast table			
	14		Standard mast lowered (OALH)	in. (mm)							
	15		Freelift (TOF)	in. (mm)							
	16		Standard mast extended w/LBR	in. (mm)							
	17		Top of OHG	in. (mm)							
	18		Operator clearance	in. (mm)							
	19	Mast tilt angle	Forward/back	degrees				3 / 4			
	20	Forks, standard (length x width x thickness)	in.				1.60 x 3.9 x 42				
	21	Headlength to face of forks	All battery compartments ***	in. (mm)				See mast table			
	22	Outtrigger ID	in.				34"- 49" (1" increments)				
	23	Battery compartment size	14.25" - (LxWxH)	in.				39.0 x 14.25 x 31.5			
			16.25" - (LxWxH)	in.				39.0 x 16.25 x 31.5			
			18.25" - (LxWxH)	in.				N/A			
21.25" - (LxWxH)			in.				39.0 x 18.25 x 31.5				
24	Turning radius - min. outside	14.25" battery compartment	in.				5.5" MAST				
		16.25" battery compartment	in.				70.6				
		18.25" battery compartment	in.				N/A				
		21.25" battery compartment	in.				N/A				
25	Aisle width - zero clearance	Right angle stack	See right angle stack table								
26	Stability	Comply with ANSI	YES								
PERFORMANCE	TRAVEL SPEED		STANDARD		OPTIONAL		STANDARD		OPTIONAL		
	28	Rearward (chassis first)	Empty/RL	mph		7.5/7.0 †		N/A		7.5/7.0 †	
	29	Forward (forks first)	Empty/RL	mph		6.6/5.8 †		N/A		6.6/5.8 †	
	LIFT SPEED ****		STANDARD		OPTIONAL		STANDARD		OPTIONAL		
	31	Empty	ft/min		130		150		150		
	31a	1,000 lb.	ft/min		110		133		135		
	32	2,000 lb.	ft/min		95		115		120		
	33	3,000 lb.	ft/min		78		100		103		
	34	3,500 lb.	ft/min		N/A		N/A		95		
	35	4,000 lb.	ft/min		N/A		N/A		N/A		
36	4,500 lb.	ft/min		N/A		N/A		N/A			
37	Lowering speeds	Empty ****	ft/min		110		140		140		
		RL ****	ft/min		110		140		140		
39	Size - front load wheels, standard	5 x 2.9				5 x 2.9					
41	Size, standard - drive tire/dual casters	13.5 x 5.5 / 7.9 x 2.2									
WHEELS & TIRES	42	Wheelbase	14.25" battery compartment	in.				5.5" MAST			
			16.25" battery compartment	in.				60.6			
			18.25" battery compartment	in.				N/A			
			21.25" battery compartment	in.				N/A			
	43	44	Brakes	Service/parking (method of control)	Foot / Auto						
Service/parking (method of operation)	Regen / spring apply (electric release)										
ELECTRIC	45	Battery type	Lead acid								
	46	Traction motor rating (60 minute rating)	hp (kw)				8.9 (6.6)				
	47	Hoist motor rating (5 minute rating)	hp (kw)				29.2 (21.8)				
	48	Traction motor control method	Transistor								
	49	Hoist motor control method	Transistor								
50	Number of speeds	Infinitely variable									

- * Short or long wheelbase is for double reach only. LWB for double reach masts 332" and below
- ** Static with rated load and max. wt. battery
- *** Includes integral sideshift, subtract 1" for without sideshift
- **** Lift and lower speeds reduced for UL 'EE'

- † Travel speed will be reduced to 7.5 / 7.0 mph (empty / rated load) with MFHs above 341" in the forks trailing direction. Travel speed will be reduced to 6.6 / 5.8 mph (empty / rated load) with MFHs above 341" in the forks leading direction. Travel speed is reduced to 7.0mph for loads 2500lbs and greater in the forks trailing direction. Travel speed is reduced to 5.8mph for loads 2500lbs and greater in the forks leading direction.

- ** High speed lowering and high speed lift are separate options
- SWB = short wheel base; LWB = long wheel base

□ COMPLETE DESIGN □ LAYOUT □ CAD DRAWINGS □ INSTALLATION

For an additional update on us, please visit us at : www.reliablestorage.co.in



RNR0 35-04EC & RNR0300EC MAST DIMENSION (5.5" STANDARD)

Overall lowered ht.	Max. fork height (TOF)	Free-lift (TOF)	Overall height (most extended) highest point w/36" LBR	Overhead guard height to top	Operator clearance	Head length (length to face of forks)				
						14.25"		16.25"		
						Single reach	Double reach	Single reach	Double reach	
in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	Single reach	Double reach	Single reach	Double reach	
3-STAGE FULL FREE-LIFT (FFL) VISTA™ MAST										
87 (2210)	191 (4851)	48 (1219)	230 (5842)	87 (2212)	74.3 (1887)	52.16	57.83	54.21	59.88	
91 (2311)	203 (5156)	52 (1321)	242 (6147)	91 (2314)	78.3 (1989)	52.16	57.83	54.21	59.88	
95 (2413)	212 (5385)	56 (1422)	251 (6375)	95 (2416)	82.3 (2090)	52.16	57.83	54.21	59.88	
101 (2565)	227 (5766)	62 (1575)	266 (6756)	95 (2416)	82.3 (2090)	52.16	57.83	54.21	59.88	
107 (2718)	242 (6147)	68 (1727)	281 (7137)	95 (2416)	82.3 (2090)	52.16	57.83	54.21	59.88	
110 (2794)	251 (6375)	71 (1803)	290 (7366)	95 (2416)	82.3 (2090)	52.16	57.83	54.21	59.88	
119 (3023)	272 (6909)	80 (2032)	311 (7899)	95 (2416)	82.3 (2090)	52.16	57.83	54.21	59.88	
125 (3175)	287 (7290)	86 (2184)	325 (8255)	95 (2416)	82.3 (2090)	52.16	57.83	54.21	59.88	
131 (3327)	302 (7671)	92 (2337)	340 (8636)	95 (2416)	82.3 (2090)	52.16	57.83	54.21	59.88	

RNR040-045EC & RNR030-035EC MAST DIMENSION (9.4" PREMIUM)

Overall lowered ht.	Max. fork height (TOF)	Free-lift (TOF)	Overall height (most extended) highest point w/36" LBR	Overhead guard height to top	Operator clearance	Head length (length to face of forks)					
						16.25"		18.25"		21.25"	
						Single reach	Double reach	Single reach	Double reach	Single reach	Double reach
in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	Single reach	Double reach	Single reach	Double reach	Single reach	Double reach
3-STAGE FULL FREE-LIFT (FFL) VISTA™ MAST											
95 (2413)	210 (5334)	59 (1509)	246 (6248)	95 (2416)	82.3 (2090)	57.20	62.91	59.17	64.92	62.12	67.91
107 (2718)	241 (6121)	71 (1814)	277 (7036)	95 (2416)	82.3 (2090)	57.20	62.91	59.17	64.92	62.12	67.91
110 (2794)	250 (6350)	74 (1890)	286 (7264)	95 (2416)	82.3 (2090)	57.20	62.91	59.17	64.92	62.12	67.91
119 (3023)	272 (6909)	83 (2118)	308 (7823)	95 (2416)	82.3 (2090)	57.20	62.91	59.17	64.92	62.12	67.91
125 (3175)	287 (7290)	89 (2271)	323 (8204)	95 (2416)	82.3 (2090)	57.20	62.91	59.17	64.92	62.12	67.91
131 (3327)	302 (7671)	95 (2423)	338 (8585)	95 (2416)	82.3 (2090)	57.20	62.91	59.17	64.92	62.12	67.91
140 (3556)	321 (8153)	104 (2652)	357 (9068)	95 (2416)	82.3 (2090)	57.20	62.91	59.17	64.92	62.12	67.91
143 (3632)	332 (8433)	107 (2728)	368 (9347)	95 (2416)	82.3 (2090)	57.20	62.91	59.17	64.92	62.12	67.91
149 (3785)	341 (8661)	113 (2880)	377 (9576)	95 (2416)	82.3 (2090)	57.20	62.91	59.17	64.92	62.12	67.91
157 (3988)	368 (9347)	121 (3084)	404 (10262)	95 (2416)	82.3 (2090)	57.20	62.91	59.17	64.92	62.12	67.91

RNR045EC & RNR035EC MAST DIMENSION (9.4" XL PREMIUM)

Overall lowered ht.	Max. fork height (TOF)	Free-lift (TOF)	Overall height (most extended) highest point w/36" LBR	Overhead guard height to top	Operator clearance	Head length (length to face of forks)			
						18.25"		21.25"	
						Single reach	Double reach	Single reach	Double reach
in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	Single reach	Double reach	Single reach	Double reach
3-STAGE FULL FREE-LIFT (FFL) VISTA™ MAST									
140 (3556)	321 (8153)	104 (2652)	357 (9068)	95 (2416)	82.3 (2090)	59.17	64.92	62.12	67.91
143 (3632)	332 (8433)	107 (2728)	368 (9347)	95 (2416)	82.3 (2090)	59.17	64.92	62.12	67.91
149 (3785)	341 (8661)	113 (2880)	377 (9576)	95 (2416)	82.3 (2090)	59.17	64.92	62.12	67.91
157 (3988)	368 (9347)	121 (3084)	404 (10262)	95 (2416)	82.3 (2090)	59.17	64.92	62.12	67.91
170 (4318)	401 (10185)	134 (3414)	437 (11100)	95 (2416)	82.3 (2090)	59.17	64.92	62.12	67.91
179 (4547)	422 (10719)	143 (3642)	458 (11633)	95 (2416)	82.3 (2090)	59.17	64.92	62.12	67.91
188 (4775)	444 (11278)	152 (3871)	480 (12192)	95 (2416)	82.3 (2090)	59.17	64.92	62.12	67.91

BATTERY AND COMPARTMENT SPECIFICATIONS

Battery specifications

Battery compmt. size	Batt. voltage	RNR035EC	RNR040EC	RNR0300EC	RNR045EC	RNR035EC	Maximum 6 Hr Rate		Battery compartment dimensions						Battery dimensions						Minimum batt. wt.	Maximum batt. wt.
							AH	KWH	"X" max.		"Y" max.		"Z" max.		"X" max.		"Y" max.		"Z" max.			
									in.	(mm)	in.	(mm)	in.	(mm)	in.	(mm)	in.	(mm)	in.	(mm)		
14.25"	36	X	X	X	N/A	N/A	775	27.2	39	990	14.25	362	31.5	800	38.8	985	14	356	31	788	1600 (726)	2100 (953)
16.25"	36	X	X	X	X	X	930	32.6	39	990	16.25	413	31.5	800	38.8	985	16	406	31	788	1850 (839)	2350 (1066)
18.25"	36	N/A	N/A	N/A	X	X	1085	38.1	39	990	18.25	464	31.5	800	38.8	985	18	457	31	788	2200 (998)	2800 (1270)
21.25"	36	N/A	N/A	N/A	X	X	1240	43.5	39	990	21.25	540	31.5	800	38.8	985	21	533	31	788	2500 (1134)	3100 (1406)

Battery connector: 24V - Red; 36V - Gray; position "B", lead length 16"

Manufacturers standard cable size not to exceed 4/0 AWG

Battery compartment is designed to accommodate standard wet cell batteries with fixed lifting eyes and no cover.

Contact Applications Engineering to verify compatibility/fit when using maintenance free, covered or non-standard batteries.


FEATURES LIST - RNR035-045EC, RNR030-035EC

PERFORMANCE	STD	OPT
36-Volt battery (includes 350 amp gray battery connector)	●	
AC traction, lift/lower and steering	●	
Transistor controller with regenerative braking	●	
Electric power steering	●	
4 Independent fully programmable performance modes - Programmable traction speed and acceleration, lift and lower speeds	●	
Load transport position		●
Fork camera (requires 9.4" mast)		●
Laser level line		●
High speed lift (NR040EC, NDR030EC)		●
High speed lift/travel (NR045EC, NDR035EC)		●
High speed lower (requires high speed lift/travel)		●
Shelf height selector		●
Return to set tilt		●
Return to center sideshifting		●
Load weight display		●
Fork height display		●
Speed sensitive steering		●
DRIVE	STD	OPT
5" x 3.9" poly articulating tandem load wheels - high load compound (std on NR035-045EC)	●	
5" x 2.9" poly articulating tandem load wheels - high load compound (std on NDR030-035EC)	●	
Dual articulating polyurethane caster wheels	●	
XL-AC™ drive tire - 13.5" x 5.5"	●	
Steered caster		●
Various sizes of load wheels		●
Various drive tire compounds		●
Tapered load wheel boxes		●
Bolt-on load wheel boxes		●
LIFT	STD	OPT
91"/203"/52"-(5.5") 3-Stage FFL mast (NR035-040EC, NDR030EC)	●	
95"/210"/59"-(9.4") 3-Stage FFL mast (NR045EC, NDR035EC)	●	
Tilting carriage (3° fwd, 4° back)	●	
Single reach mast with 33.5" wide class II with integral sideshift (hook type carriage) (std on NR035-045EC)	●	
Double reach mast with 33.5" wide class II with integral sideshift (hook type carriage) (std on NDR030-035EC)	●	
36" High load backrest extension	●	
Lift limit		●
48" High load backrest extension		●
Single reach mast without integral sideshift for standard 33.5" wide carriage		●
(9.4") 3-Stage full free lift mast (NR040EC, NDR030EC)		●
Various mast heights for 5.5" and 9.4" masts		●
HANDLING	STD	OPT
Forks: 1.8" x 3.9" (45 mm x 100 mm) 42" (1067 mm) - class II, hook type (std on NR040-045EC)	●	
Forks: 1.6" x 3.9" (40 mm x 100 mm) 42" (1067 mm) - class II, hook type (std on NDR030-035EC and NR035EC)	●	
Fully proportional lift/lower control	●	
Control handle with simultaneous hydraulic functions	●	
Slack chain detection	●	
Reduced travel speed with carriage extended		●
Various fork lengths		●
ERGONOMICS	STD	OPT
Operator sensing system	●	
EZ Ride floor	●	
Low profile anti-fatigue floormat	●	
Adjustable armrest and backrest (sidestance operator controls only)	●	

ERGONOMICS CONTINUED	STD	OPT
Steer tiller position adjustment	●	
Low step height	●	
Padded operator compartment	●	
5" Smart display: color touchscreen	●	
Yale Smart Ride® floor (full suspension floor)		●
7" Smart display: color touchscreen		●
Operator overhead fan		●
Dual LED headlights		●
Rear LED worklight		●
Operator LED desktop light		●
OPERATION	STD	OPT
Standard construction	●	
UL classification E	●	
Sidestance operator controls	●	
Key switch start	●	
Wire mesh mast guard	●	
Automotive steering	●	
2 USB ports	●	
Static strap	●	
Electronic horn	●	
Sealed battery rollers	●	
Operator's overhead guard	●	
Rear post operator protection	●	
Power disconnect button	●	
Forward stance with aft operator control handle		●
Reverse steering		●
Clear mast guard		●
Keyless start		●
Rotary joystick (standard for cooler/freezer)		●
Battery gate interlock		●
Cooler/freezer construction (0°F to 120°F) with rubber floormat		●
SubZero freezer construction (operating temperatures -40°F to 120°F) with rubber floormat		●
SubZero freezer with heated floor and control handle (operating temperatures -40°F to 120°F) with anti-slip floorplate covering		●
UL classification EE		●
Outrigger ID - 34" to 49" in 1" Increments		●
Audible back-up and motion alarms		●
Visible amber strobe light - continuous activated		●
Impact monitor		●
Blue LED spotlights		●
RF terminal bracket		●
RF handheld scanner holder		●
12-Volt DC auxiliary power supply		●
Wire mesh on top overhead guard		●
Rear operator compartment door (SPED)		●
Yale Vision		●
Yale Reliant™ (available on NR045EC)		●
ENERGY SYSTEM	STD	OPT
Lead acid	●	
SUPPLEMENTAL	STD	OPT
Operating manual	●	

* Doors are intended to protect the operator from objects that may enter the operator's compartment but they may also slow the operator's egress in emergency situations. A review of the forklift's intended environment should be conducted before selecting a door as optional equipment.

** For 5.5" Mast Sideshift includes 7" travel (3.5" each side). Sideshift travel will be reduced to 3" total (1.5" each side) when Outrigger ID is less than 39". For 9.4" Mast Sideshift includes 8" travel (4" each side). Sideshift travel will be reduced to 4" total (2" each side) when Outrigger ID is less than 39".

Think outside the box




Drive-in Drive Thru Pallet Racking



Modular Mezzanine Floor



Narrow Aisle Pallet Racking

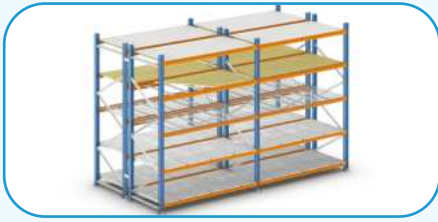

LONG SPAN SHELVING RACK



Boltless Long Span Shelving Rack



Multi Tier Long Span Shelving Rack



Cantilever Racking



M.S Powder Coated Cupboard



Rivet Shelving Rack



Mobile Shelving Rack, Compactor



M.S Powder Coated Lockers



Electric Forklift

www.reliablestorage.co.in



RELIABLE
STORAGE SYSTEMS

ADDRESS :- 103, Lake View Residency, Bhabola - Bangli Road,
Near Husaini Colony, Sandor , Vasai(W),
Dist. Palghar Pin.401 207 Maharashtra, India.

FACTORY :- Unit no. 15, 16, 17, 18 Mamta Compound,
Near Neel Kant Industrial Estate, Vilage
Devdal, Kaman, Vasai(E) - 401208 Maharashtra, India.

PHONE :- 98236 35153 | 98672 89052 | 9320011052

EMAIL :- sales@reliablestorage.co.in | inquiry@reliablestorage.co.in