



RELIABLE
STORAGE SYSTEMS

ELECTRIC FORKLIFT (4Wheel)



*One Stop Storage Solution
In Material Handling Equipments*

Electric ForkLift (4 Wheel)

ELECTRIC FORKLIFT (4 Wheels)




Service

- AC traction and hydraulic motors reduce maintenance cost
- IP54 design enhances reliability
- The controller assembly is mounted inside the counterweight and is protected by an easy to remove cover
- Canbus communication simplifies troubleshooting



Operations and Compliance

- High visibility mast with soft landing as standard to absorb shocks
- Controlled mast lowering speed avoids damaging goods
- Secure overhead guard passed CE drop test and safety standards
- Operator presence system provides increased operator safety
- LED lights as standard
- Sequential seatbelt interlock feature and travel speed limiting with mast elevated

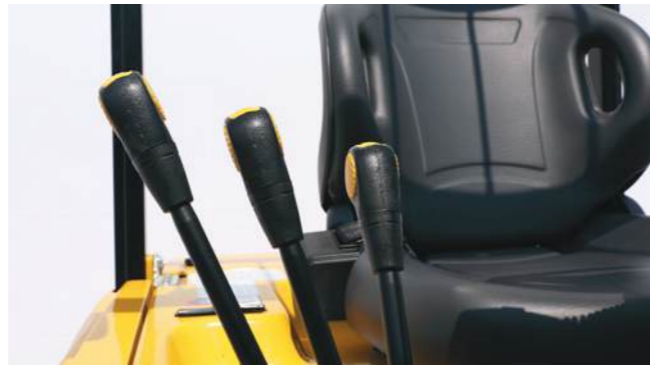

Comfort

- Hydraulic power steering requires low steering effort without kick-back which allows for precise positioning
- Full suspension seat reduces driver fatigue
- Low noise and vibration
- Low entrance step and large floor space
- Adjustable steering column and seat to suit all operators



Performance

- Simple and clear display of speed, power, error code, working hours ensure that the operator is fully informed
- The latest colour display integrated with functions such as performance selection allows the operator to configure the truck to meet different application requirements
- AC traction and lifting motors, with electronic control delivers a high level of performance

Electric ForkLift (4 Wheel)

Mast Specifications

RERP15-18UX Mast and Capacity Chart

	Max fork height (mm)	Overall Extended Height						Free Lift		Mast Tilt		Capacity without Side Shift			
		Lowered height (mm)		Lift height				Without LBR (mm)	With LBR (mm)	Forward (Deg)	Back (Deg)	@ 500mm Single Pneumatic Tyre (kg)		@ 600mm Single Pneumatic Tyre (kg)	
		1.5t	1.8t	Without LBR (mm)		With LBR (mm)						1.5t	1.8t	1.5t	1.8t
				1.5t	1.8t	1.5t	1.8t								
2LFL	3300	2140	2140	4284	4284	3813	3813	135	135	5	10	1500	1800	1350	1620
	3500	2240	2240	4484	4484	4013	4013	135	135	5	10	1500	1800	1350	1620
	4000	2540	2540	4984	4984	4513	4513	135	135	5	10	1400	1700	1260	1532
2FFL	3000	1990	1990	3984	3984	3513	3513	1415	1030	5	10	1500	1800	1350	1620
	3300	2140	2140	4284	4284	3813	3813	1565	1180	5	10	1500	1800	1350	1620
3FFL	4500	2040	2040	5484	5484	5013	5013	1470	1080	5	6	1200	1400	1080	1260
	4800	2140	2140	5784	5784	5313	5313	1570	1180	5	6	1100	1200	990	1080
	5500	2405	2405	6484	6484	6013	6013	1835	1445	3	6	750	850	670	760
	6000	2590	2610	6984	6984	6513	6513	2040	1650	3	6	450	550	400	490

RERP20-25UX Mast and Capacity Chart

	Max fork height (mm)	Overall Extended Height						Free Lift		Mast Tilt		Capacity without Side Shift			
		Lowered height (mm)		Lift height				Without LBR (mm)	With LBR (mm)	Forward (Deg)	Back (Deg)	@ 500mm Single Pneumatic Tyre (kg)		@ 600mm Single Pneumatic Tyre (kg)	
		2t	2.5t	Without LBR (mm)		With LBR (mm)						2t	2.5t	2t	2.5t
				2t	2.5t	2t	2.5t								
2LFL	3300	2165	2165	3915	3915	4317	4317	140	140	5	10	2000	2500	1810	2260
	3500	2265	2265	4115	4115	4517	4517	140	140	5	10	2000	2500	1810	2260
	4000	2565	2565	4615	4615	5017	5017	140	140	5	10	2000	2500	1810	2260
2FFL	3000	2015	2015	3615	3615	4017	4017	1385	985	5	10	2000	2500	1810	2260
	3300	2165	2165	3915	3915	4317	4317	1535	1135	5	10	2000	2500	1810	2260
3FFL	4500	2075	2075	5171	5171	5516	5516	1440	1040	5	6	1600	2000	1450	1810
	4800	2175	2175	5471	5471	5816	5816	1540	1140	5	6	1250	1700	1130	1540
	5500	2440	2440	6171	6171	6516	6516	1800	1400	3	6	900	1200	810	1090
	6000	2625	2625	6671	6671	7016	7016	1990	1590	3	6	700	800	630	720

RERP30UX Mast and Capacity Chart

	Max fork height (mm)	Overall Extended Height				Free Lift		Mast Tilt		Capacity without Side Shift	
		Lowered height (mm)	Lift height		Without LBR (mm)	With LBR (mm)	Forward (Deg)	Back (Deg)	@ 500mm Single Pneumatic Tyre (kg)	@ 600mm Single Pneumatic Tyre (kg)	
			3t						3t	3t	
		3t	3t	3t							
2LFL	3300	2195	3940	4440	165	165	5	10	3000	2720	
	3500	2295	4140	4640	165	165	5	10	3000	2720	
	4000	2595	4640	5140	165	165	5	10	2850	2580	
2FFL	3000	2045	3640	4140	1390	935	5	10	3000	2720	
	3300	2195	3940	4440	1540	1085	5	10	3000	2720	
3FFL	4500	2095	5165	5640	1510	975	5	6	2500	2270	
	4800	2195	5465	5940	1610	1075	5	6	2250	2040	
	5500	2460	6165	6640	1865	1330	3	6	1600	1450	
	6000	2645	6665	7140	2060	1525	3	6	1200	1090	

RERP35UX Mast and Capacity Chart

	Max fork height (mm)	Overall Extended Height				Free Lift		Mast Tilt		Capacity without Side Shift	
		Lowered height (mm)	Lift height		Without LBR (mm)	With LBR (mm)	Forward (Deg)	Back (Deg)	@ 500mm Single Pneumatic Tyre (kg)	@ 600mm Single Pneumatic Tyre (kg)	
			3.5t						3.5t	3.5t	
		3.5t	3.5t	3.5t							
2LFL	3300	2270	4010	4440	170	170	5	10	3500	3180	
	3500	2370	4210	4640	170	170	5	10	3500	3180	
	4000	2670	4710	5140	170	170	5	10	3300	3000	
2FFL	3000	2120	3700	4100	1415	1000	5	10	3500	3180	
	3300	2270	4000	4400	1565	1150	5	10	3500	3180	
3FFL	4500	2170	5250	5650	1510	975	5	6	2800	2550	
	4800	2270	5550	5950	1610	1075	5	6	2500	2270	
	5500	2535	6250	6650	1865	1330	3	6	1700	1540	
	6000	2720	6750	7150	2060	1525	3	6	1300	1180	

Note: For integral sideshifts deduct 50kg from stated capacity


Electric ForkLift (4 Wheel)

Electric ForkLift (4 Wheel)

► Specifications

Distinguishing mark	Model designation							
		RERP15UX	RERP18UX	RERP20UX	RERP25UX	RERP30UX	RERP35UX	
1.1	Model designation							
1.2	Power: battery, diesel, LPG, electric mains	Battery	Battery	Battery	Battery	Battery	Battery	
1.3	Operation: manual, pedestrian, stand, seat, orderpicker	Seated	Seated	Seated	Seated	Seated	Seated	
1.4	Load capacity	Q (kg)	1500	1800	2000	2500	3000	3500
1.5	Load centre	c (mm)	500	500	500	500	500	500
1.6	Load distance	x (mm)	410	410	454	454	475	495.5
1.7	Wheelbase	y (mm)	1380	1380	1485	1485	1670	1690
Weight								
2.1	Unladen weight (max. battery)	kg	2950	3230	3930	4100	4750	5400
2.2	Axle loading, laden front/rear (max. battery)	kg	3960/490	4280/610	5160/750	5755/845	6900/850	7865/1035
2.3	Axle loading, unladen front/rear (max. battery)	kg	1390/1560	1290/1800	1895/2035	1650/2450	2070/2680	2300/3100
Tyres, chassis								
3.1	Tyres: L=pneumatic, V=cushion SE= superelastic	SE	SE	SE	SE	SE	SE	
3.2	Tyre size, front		6.00-9	21x8-9	23x9-10	23x9-10	23x9-10	23x10-12
3.3	Tyre size, rear		5.00-8	5.00-8	18x7-8	18x7-8	18x7-8	200/50-10
3.5	Number of wheels, front/rear (X = driven)		2x/2	2x/2	2x/2	2x/2	2x/2	2x/2
3.6	Track width, front	b10 (mm)	955	955	1058	1058	1065	1124
3.7	Track width, rear	b11 (mm)	920	920	960	960	980	1010
4.1	Mast tilt, forward a /back b	degrees	5/10	5/10	5/10	5/10	5/10	5/10
4.2	Height of mast, lowered	h1 (mm)	2000	2000	2015	2015	2045	2120
4.3	Free lift,	h2 (mm)	135	135	140	140	165	165
4.4	Lift height,	h3 (mm)	3000	3000	3000	3000	3000	3000
4.5	Height of mast, extended	h4 (mm)	3980	3980	3980	3980	3980	3980
4.7	Height to top of overhead guard	h6 (mm)	2155	2155	2152	2152	2152	2138
4.8	Seat height	h7 (mm)	1080	1080	1080	1080	1080	1080
4.12	Towing coupling height	h10 (mm)	290	290	250	250	270	270
4.19	Overall length (with forks)	l1 (mm)	2993	2993	3356.5	3356.5	3618	3709
4.20	Length to face of forks	l2 (mm)	2073	2073	2286.5	2286.5	2548	2639
4.21	Overall width	b1 (mm)	1120	1120	1285	1285	1285	1365
4.22	Fork dimensions	s/e/l (mm)	35/100/920	35/100/920	40/122/1070	40/122/1070	45/122/1070	50/122/1070
4.23	Fork carriage DIN 15173. Class, A/B		2A	2A	2A	2A	3A	3A
4.24	Fork carriage width	b3 (mm)	1040	1040	1040	1040	1100	1100
4.25	Width over forks	b5 (mm)	890	890	1000	1000	1060	1060
4.31	Ground clearance, laden, below mast	m1 (mm)	95	95	65	65	65	80
4.32	Ground clearance at centre of wheelbase	m2 (mm)	105	105	95	95	110	83
4.33	Aisle width with pallets 1000mm long x 1200mm wide	Ast (mm)	3541	3541	3732	3732	4025	4101
4.34	Aisle width with pallets 800mm wide x 1200mm long	Ast (mm)	3741	3741	3932	3932	4225	4301
4.35	Outer turning radius	Wa (mm)	1965	1965	2080	2080	2349	2405
4.36	Inner turning radius	b13 (mm)	703	703	599	599	830	815
Performance data								
5.1	Travel speed laden/unladen	km/h	15/16	15/16	15/16	15/16	15/16	15/16
5.2	Lifting speed laden/unladen	mm/s	320/400	300/400	320/400	280/400	320/400	280/400
5.3	Lowering speed laden/unladen	mm/s	390/500	390/500	390/420	390/420	390/420	400/320
5.6	Maximum drawbar pull laden/unladen, 5 minute rating	N	11600/7500	11600/7500	13000/10500	13000/10500	19000/11000	19000/11000
5.8	Maximum gradeability with/without load, 5 minute rating	%	15/23	14/22	15/23	15/22	15/22	15/22
5.9	Acceleration time with/without load 10m	sec	5/4.5	5/4.5	5.4/4.5	5.5/4.7	5.5/4.7	5.7/5.2
5.10	Service brake		Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Electric-Motor								
6.1	Drive Motor Rating, S2, 60min	kW	6.5	6.5	8.5	8.5	11.5	11.5
6.2	Lifting motor, S3 15% rating	kW	8.6	8.6	11	11	15	15
6.4	Battery voltage/capacity (5hr rate)	V/Ah	48/420	48/420	48/600	48/600	80/500	80/500
6.5	Battery weight (min/max)	kg	710	710	950	950	1420	1420
NEW	Battery dimensions	l/w/h (mm)	985/465/750	985/465/750	1028/500/780	1028/500/780	1028/674/780	1028/674/780
6.6	Power consumption in accordance with VDI cycle	kWh/h	4.8	5.0	5.7	6.2	7.6	8.0
Additional data								
8.1	Drive control		AC	AC	AC	AC	AC	AC
	Manufacturer		Curtis	Curtis	Curtis	Curtis	Curtis	Curtis
8.2	Operating pressure for attachments	bar	145	145	175	175	175	175
8.3	Oil volume for attachments	l/min	38	38	38	38	38	38
8.4	Average noise level at operator's ear	dB (A)	70.3	70.3	67.5	67.5	71.8	71.8
8.5	Towing coupling, type DIN		Ø30 Pin	Ø30 Pin	Ø30 Pin	Ø30 Pin	Ø30 Pin	Ø30 Pin

► Dimensions

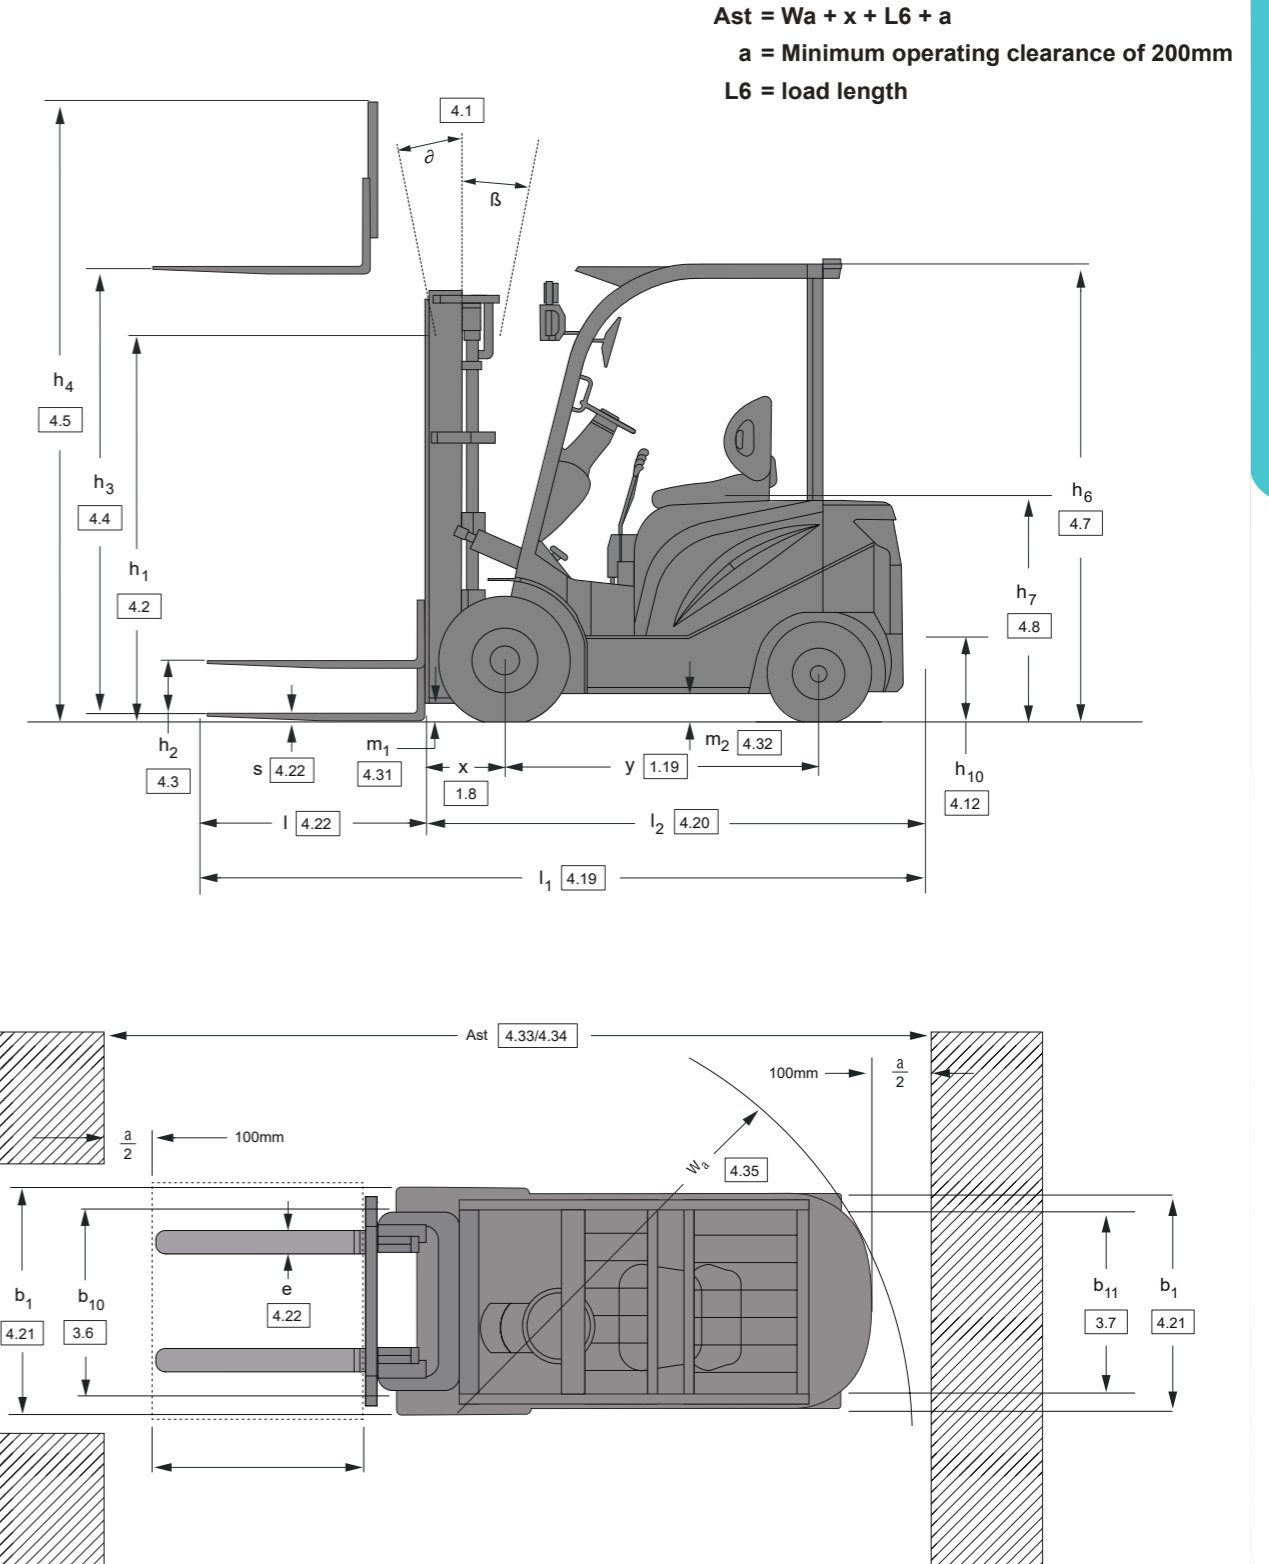

Think outside the box



Drive-in Drive Thru Pallet Racking



Modular Mezzanine Floor



Narrow Aisle Pallet Racking



LONG SPAN SHELVING RACK



Boltless Long Span Shelving Rack



Multi Tier Long Span Shelving Rack



Cantilever Racking



M.S Powder Coated Cupboard



Rivet Shelving Rack



Mobile Shelving Rack, Compactor



M.S Powder Coated Lockers



Electric Forklift

www.reliablestorage.co.in



RELIABLE
STORAGE SYSTEMS

ADDRESS :- 103, Lake View Residency, Bhabola - Bangli Road,
Near Husaini Colony, Sandor , Vasai(W),
Dist. Palghar Pin.401 207 Maharashtra, India.

FACTORY :- Unit no. 15, 16, 17, 18 Mamta Compound,
Near Neel Kant Industrial Estate, Vilage
Devdal, Kaman, Vasai(E) - 401208 Maharashtra, India.

PHONE :- 98236 35153 | 98672 89052 | 9320011052

EMAIL :- sales@reliablestorage.co.in | inquiry@reliablestorage.co.in